


# Creating Agents in Data Center Console

It is possible to create new Agents on CDP servers using the Data Center Console. Follow the instructions below.

1. Select "Agents" from the Main Menu.




You will enter the "Agents" screen.

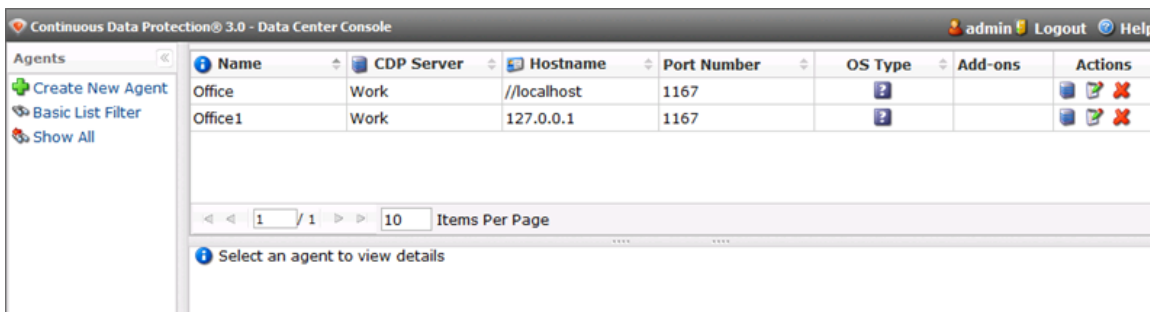

The list of all Agents from all connected CDP servers is displayed.

2. Click on "Create New Agent."




3. The "Create New Agent" window will appear.



The screenshot shows the "Create New Agent" window with the following fields and options:

- Settings** (gear icon)
- Identification** (info icon):
  - CDP Servers: [Empty]
  - Name: [Empty]
  - Hostname: [Empty]
  - Port Number: 1167
- Add-ons** (plus icon)
- Owner** (person icon):
  - Owner: [Empty]
  - Permissions:  Full Control,  [Computer icon],  [Printer icon],  [Folder icon],  [Network icon],  [Share icon]
- Buttons:  (plus icon),  (prohibited sign icon)

4. Fill in all the required fields and click "Create."

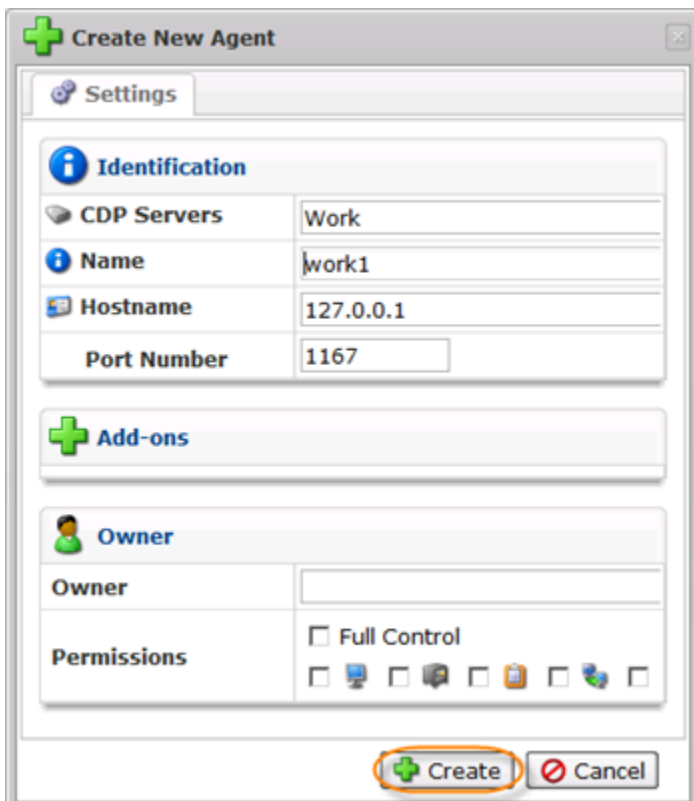

The screenshot shows the "Create New Agent" window with the following fields and options filled out:

- Settings** (gear icon)
- Identification** (info icon):
  - CDP Servers: Work
  - Name: work1
  - Hostname: 127.0.0.1
  - Port Number: 1167
- Add-ons** (plus icon)
- Owner** (person icon):
  - Owner: [Empty]
  - Permissions:  Full Control,  [Computer icon],  [Printer icon],  [Folder icon],  [Network icon],  [Share icon]
- Buttons:  (plus icon, highlighted with an orange circle),  (prohibited sign icon)

- Name - Enter a name for the Agent. It will be displayed in the "Agents" List.
- Host Name - Enter the Host Name or IP address of the Agent.
- Port Number - Define a Port to connect to the Agent if different from the default value (1167). You can configure the default Agent port using the Windows CDP Configuration Utility.



#### Tip

If you have Agents with the same IP addresses but with different ports in your environment, create several DNS names that resolve to the Hosts' IP. Specify different Agent port numbers.

- Add-ons - Enable MySQL database Add-on.
- Owner - Define the Agent's owner.
- Permissions - Specify the Agent's owner permissions.



#### Note

A Power-User creating an Agent becomes it's owner by default.  
Only a Super-User may change an Agent's owner.

Icon	Description
	Can edit the agent's settings
	Can manipulate disk safes for agent
	Can manipulate policies for agent
	Can restore files from agent's recovery points
	Can browse agent's recovery points (read-only)
	Can edit agent's users
	Can view agent's tasks in task history console

5. The new Agent will appear on the CDP server.