
Linux Agent CLI - Making a Tarball of Your Kernel

R1Sort allows to make a tarball of your Kernel without sending it to the cki servers. This is used mainly if the server has no network access.


Follow the instructions below to make a tarball of your Kernel.

1. To build a module use r1soft-setup to build a header tarball.

```
# r1soft-setup --tarball-only /tmp/kernel-tarball.tar.gz
```



2. Wait till process complete.

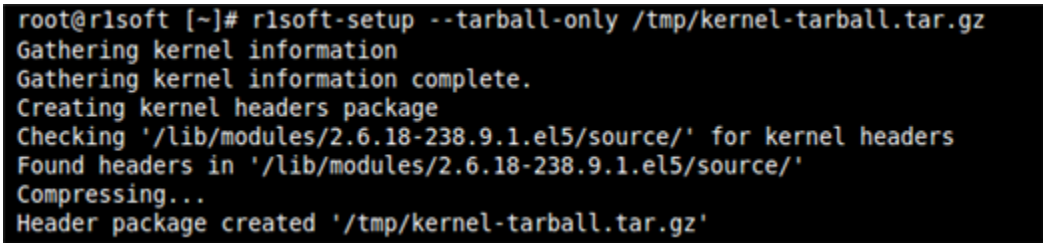

3. Visit https://krnlbld.r1soft.com/ to do an offline module build.

4. Upload the tarball and place the module in /lib/modules/r1soft.

See more information about the r1soft-setup tool in r1soft-setup.