

Enabling Databases Add-On for Agent

Enabling the Databases Add-on makes possible the protection of one or more SQL, MySQL, and Exchange databases on the server where the Agent is installed.

You can enable the Databases Add-on while [adding the agent to the system](#) or for already created Agents. See [Changing Agents](#).

[Enabling the Database Add-On for New Agent](#) | [Enabling the Database Add-On for Existing Agent](#)


Enabling the Database Add-On for New Agent

Follow the instructions below to enable the Databases Add-On in the "Create New Agent" window in your CDP Enterprise Edition.

1. Click on "Agents" in the Main Menu to access the "Agents" page.



2. Then click "Create New Agent" in the Agents menu located in the top left area.

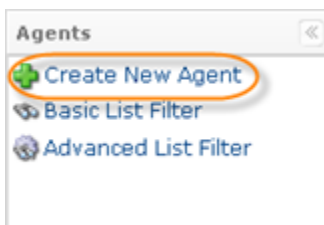

3. When the "Create New Agent" page loads, you will be able to set the agent options. They are

described in [Adding the Agent to the CDP Server](#).

4. Select the "Enable database add-on" checkbox.

The screenshot shows the 'Create New Agent' window with the following details:

- Settings** tab selected.
- Identification** section:
 - Name: New Agent
 - Host Name/IP: serv1
 - Port Number: 1167
- Add-ons** section:
 - Enable database add-on (circled in red)
- Buttons: Test Agent Connection, Create, Cancel.

5. Click "Create."




6. The "Database Add-on" icon will appear in the "Add-ons" column for this Agent in the Agents list.

Name	Host Name/IP	Port Number	OS Type	Add-ons
agent 57	10.230.106.57	1167	Windows	
agent231	10.230.200.231	1167	Windows	
NewAgent	serv1	1167	Linux	Database Add-on (circled in red)

Enabling the Database Add-On for Existing Agent

Follow the instructions below to enable the Databases Add-On in the "Edit Agent" window in your CDP Enterprise Edition.

1. Click on "Agents" in the Main Menu to access the "Agents" page.

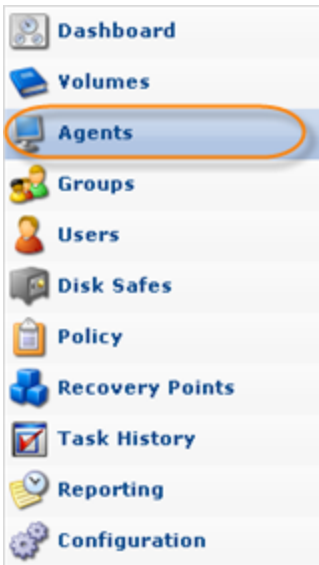





2. The "Agents" page will list all existing CDP Agents.



Tip


To find an Agent, you can use the Basic and Advanced List Filters. See [Customizing the Agents List](#).

To change the existing Agent properties, click on the "Edit" icon under the "Actions" column for the corresponding Agent in the list.

<input type="checkbox"/>	Name	Host Name/IP	Port Number	OS Type	Add-ons	
<input type="checkbox"/>	agent 57	10.230.106.57	1167	⚠		 
<input type="checkbox"/>	agent231	10.230.200.231	1167	⚠		 

1 / 1 Items Per Page

3. Select the "Enable database add-on" checkbox.

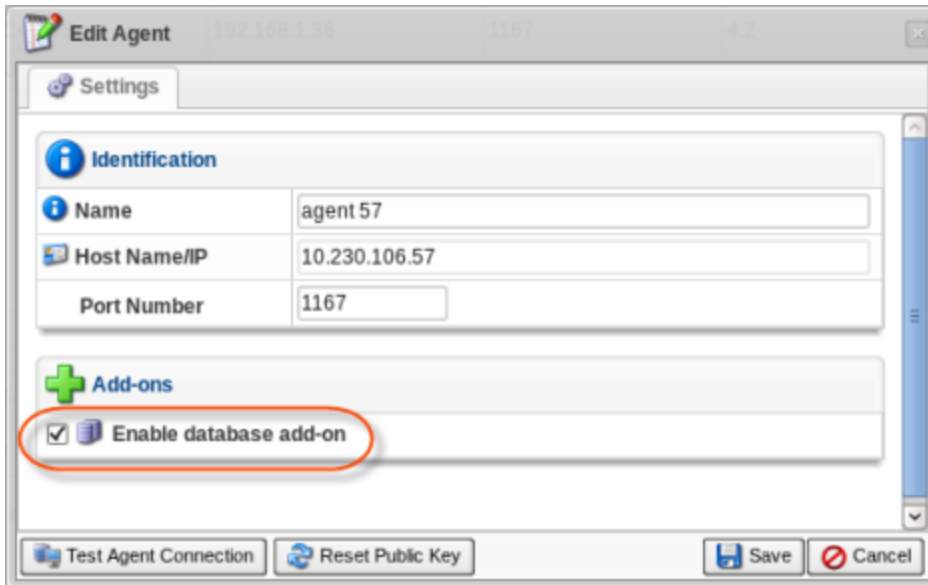

4. Once you have finished editing, click on the "Save" button.



5. The "Database Add-on" icon will appear in the "Add-ons" column for this Agent in the Agents list.

Name	Host Name/IP	Port Number	OS Type	Add-ons
agent 57	10.230.106.57	1167	Linux	Database Add-on
agent231	10.230.200.231	1167	Linux	

The following steps are described in:
MySQL:

- Installing the MySQL Connector JDBC into CDP3 Server
- Adding a MySQL Instance to a Policy

SQL Server:

- Configuring MS SQL Server Replication

Exchange:

- Configuring an Exchange Instance