Linux Agent CLI - Getting a Kernel Module

R1Soft allows to gets a binary module, without building a module from headers.

Follow instructions below to get a Kernel module and install.

1. Run the #r1soft-setup command with the --binary-only option.

```
# r1soft-setup --binary-only
```



2. Wait till checking for binary module complete.

```
Checking for binary module
Waiting                    -
Complete.
```

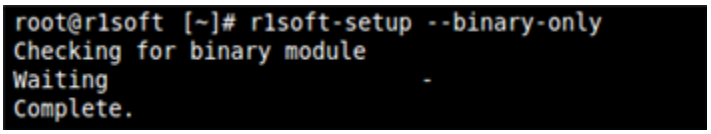

> **Note**
> The default destination for Kernel module is /lib/modules/r1soft/.

3. Once module installed, restart the Agent. Run the following command:

```
/etc/init.d/cdp-agent restart
```

See Linux Agent CLI - Restarting The Agent.

For more information about #r1soft-setup tool and its options see r1soft-setup.