


MS SQL Server Restore to Alternate Location

Symptom

When performing an MS SQL Server restore to an alternate directory, the directory must exist, or the restore will fail.

Resolution

You must first create a restore directory before you can restore the MS SQL Server to it.

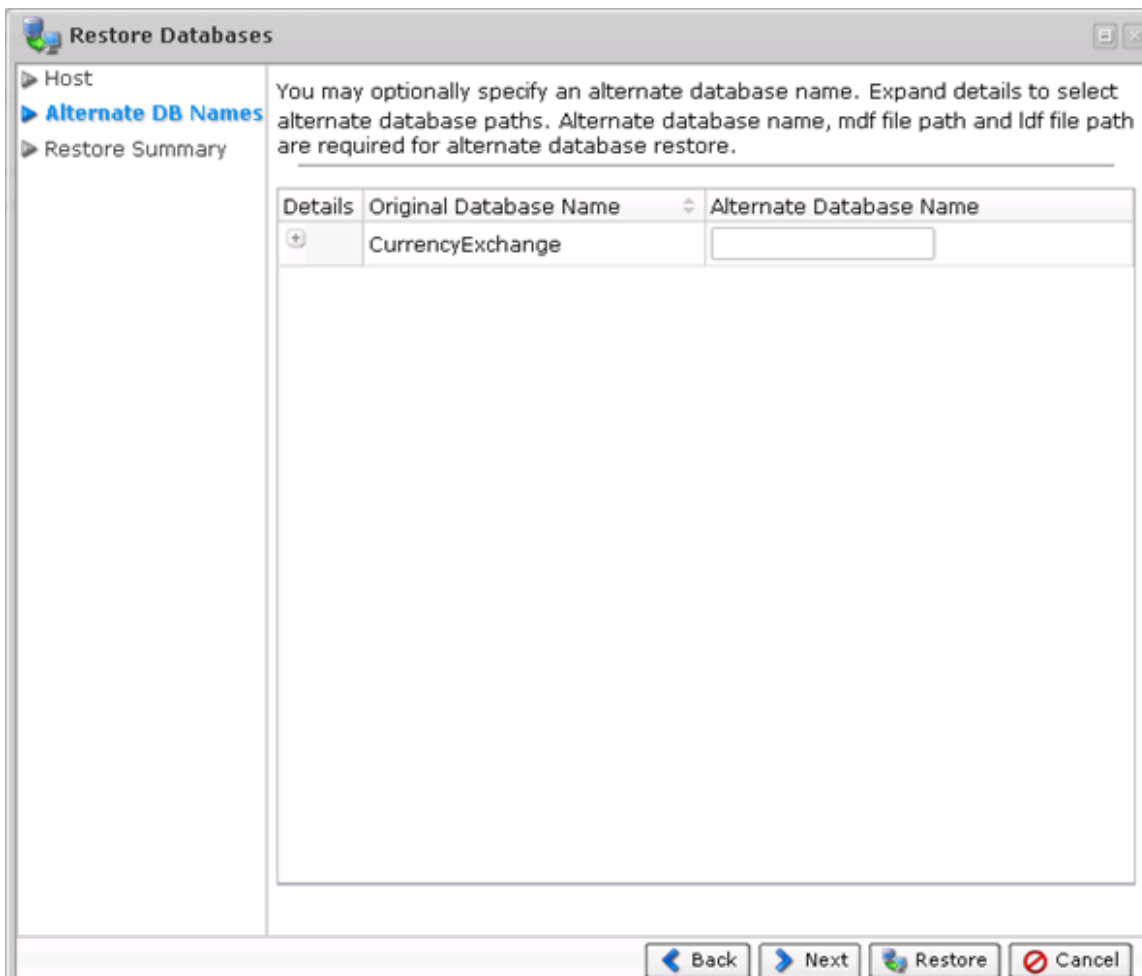

See:

- [Protecting SQL Server](#)

Related Articles

Page: [MS SQL Server Restore to Alternate Location \(CDP\)](#) Labels: sql

Page: [MS SQL Server Restore with Alternate Name \(CDP\)](#) Labels: sql

Page: [System Requirements - CDP for Databases \(CDP\)](#) Labels: mysql, sql, exchange
