

Vacuuming Disk Safes in Data Center Console

Vacuuming Disk Safe allows you to reduce the on-disk size. Block Stores are vacuumed in-place when the Vacuum function is selected by a user.

Follow the instructions below to vacuum a Disk Safe in Data Center Console.

1. Click "Disk Safes" in the Main Menu to access the "Disk Safes" page.



2. In the "Disk Safes" list, find the Disk Safe you need and click the "Vacuum" icon located in the "Actions" column next to the appropriate Disk Safe.


Edit Selected		Vacuum Selected		Open Selected		Close Selected		Detach Selected	
<input type="checkbox"/>	CDP Server	Name	Agent	Volume					
<input type="checkbox"/>	Ubuntu_CDP	dfid;lg	Agent_Ubuntu	volume2	0	0	4.1 MB	✓	⊞
<input type="checkbox"/>	Ubuntu_CDP	DiskSafe	Agent		9	3	2.1 GB	✓	⊞
<input type="checkbox"/>	Ubuntu_CDP	DS	Agent_Ubuntu		✗	✗	✗	✗	✗




Tip

To find a Disk Safe, you can use the Basic and Advanced List Filters. See [Monitoring Disk Safes in Data Center Console](#).

3. After clicking the "Vacuum" icon, a warning window opens. Confirm your request to vacuum the selected Disk Safe by clicking "Vacuum."

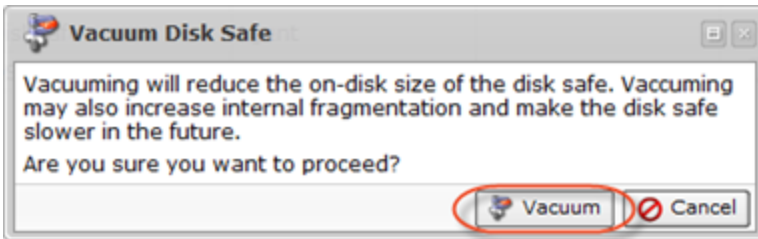


4. You will receive a notification that the Vacuum Task has been scheduled. Click "OK." The Task will run immediately after its creation.

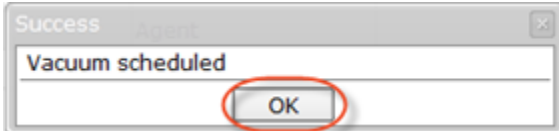


Tip
The Task results can be sent via email as a Report. See [Data Center Console Email Reporting](#).

Bulk Vacuuming

1. Select some or all disk safe to vacuum using the check boxes.

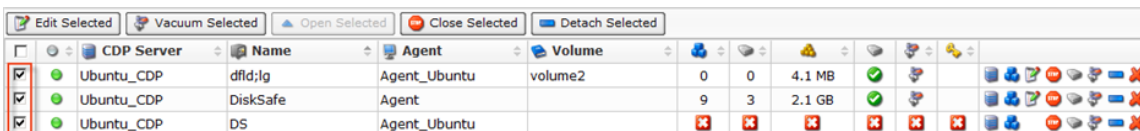

2. Click on the "Vacuum selected" button.

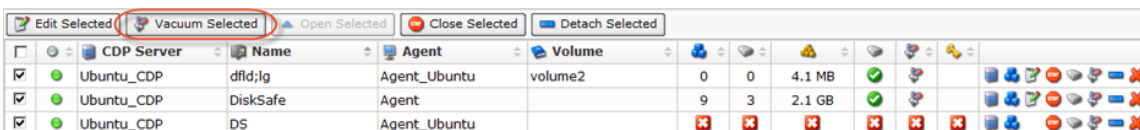

3. Confirm your request to vacuum the selected Disk Safe by clicking "Vacuum" in the warning window.

