

Closing Disk Safes in Data Center Console

Closing a Disk Safe will prevent any tasks associated with it from running. You will not be able to browse the Recovery Points contained within the Disk Safe.

Note
You can close only opened (enabled) Disk Safes.

For the closed Disk Safes, the following actions are available:

- Open
- Detach
- Delete

Follow the instructions below to close a Disk Safe in CDP.

1. Click on "Disk Safes" in the Main Menu to access the "Disk Safes" page.




2. In the "Disk Safes" list, find the Disk Safe you need and click on the "Close" icon located in the "Actions" column next to the appropriate Disk Safe.

		Edit Selected		Vacuum Selected		Open Selected		Close Selected		Detach Selected	
<input type="checkbox"/>	CDP Server	Name	Agent	Volume	Size	Used	Health	Actions	Actions	Actions	Actions
<input type="checkbox"/>	Ubuntu_CDP	D_safe	Agent_CentOS	Volume1	0	0	4 MB	✓	⊕	⊖	⊗
<input type="checkbox"/>	Ubuntu_CDP	dfld;lg	Agent_Ubuntu	volume2	0	0	4.1 MB	✓	⊕	⊖	⊗
<input type="checkbox"/>	Ubuntu_CDP	DiskSafe	Agent		Offline	Offlin	Offline	Offlin	Offlin	⊕	⊖
<input type="checkbox"/>	Ubuntu_CDP	DS	Agent_Ubuntu		Offline	Offlin	Offline	Offlin	Offlin	⊕	⊖

**Tip**

To find a Disk Safe, you can use the Basic and Advanced List Filters. See [Monitoring Disk Safes in Data Center Console](#).

3. After clicking on the "Close" icon, a warning window opens. Confirm your request to close the selected Disk Safe by clicking on "Close."

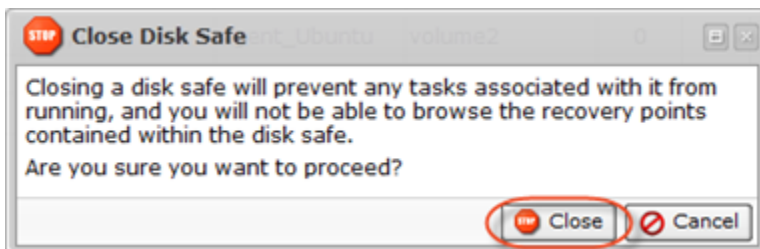

4. The closed Disk Safe is now marked by a red icon in the "State" column in the "Disk Safes" list.

CDP Server		Name	Agent	Volume	Size	Used	State	Health	Actions
<input type="checkbox"/>	Ubuntu_CDP	D_safe	Agent_CentOS	Volume1	0	0	4 MB	✓	[Icons]
<input type="checkbox"/>	Ubuntu_CDP	dfld;lg	Agent_Ubuntu	volume2	0	0	4.1 MB	✓	[Icons]
<input checked="" type="checkbox"/>	Ubuntu_CDP	DiskSafe	Agent		Offline	Offlin	Offline	Offlin	Offlin
<input type="checkbox"/>	Ubuntu_CDP	DS	Agent_Ubuntu		Offline	Offlin	Offline	Offlin	Offlin

Bulk Disk Safe Closing

Follow the instructions below to close several Disk Safes at once.


1. Select several Disk Safes by selecting the checkboxes in the first column in the Disk Safes list.

CDP Server		Name	Agent	Volume	Size	Used	State	Health	Actions
<input checked="" type="checkbox"/>	Ubuntu_CDP	D_safe	Agent_CentOS	Volume1	0	0	4 MB	✓	[Icons]
<input checked="" type="checkbox"/>	Ubuntu_CDP	dfld;lg	Agent_Ubuntu	volume2	0	0	4.1 MB	✓	[Icons]
<input type="checkbox"/>	Ubuntu_CDP	DiskSafe	Agent		Offline	Offlin	Offline	Offlin	Offlin
<input type="checkbox"/>	Ubuntu_CDP	DS	Agent_Ubuntu		Offline	Offlin	Offline	Offlin	Offlin

2. Click on "Close Selected" located in the "Disk Safes" list toolbar.

CDP Server		Name	Agent	Volume	Size	Used	State	Health	Actions
<input checked="" type="checkbox"/>	Ubuntu_CDP	D_safe	Agent_CentOS	Volume1	0	0	4 MB	✓	[Icons]
<input checked="" type="checkbox"/>	Ubuntu_CDP	dfld;lg	Agent_Ubuntu	volume2	0	0	4.1 MB	✓	[Icons]
<input type="checkbox"/>	Ubuntu_CDP	DiskSafe	Agent		Offline	Offlin	Offline	Offlin	Offlin
<input type="checkbox"/>	Ubuntu_CDP	DS	Agent_Ubuntu		Offline	Offlin	Offline	Offlin	Offlin

3. A warning window will open. Confirm your request to close the selected Disk Safe by clicking on "Close."

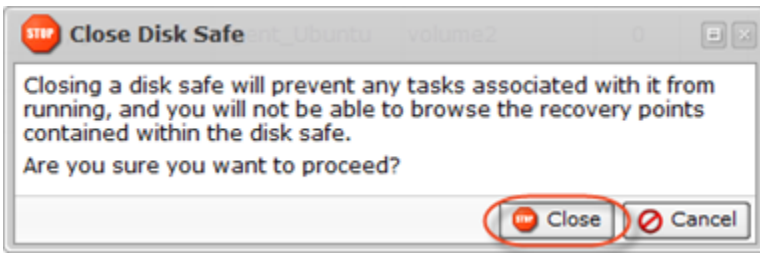

4. The Disk Safes in the list are now marked by red icons in the "State" column.

		CDP Server:		Name	Agent	Volume										
<input checked="" type="checkbox"/>		Ubuntu_CDP	D_safe	Agent_CentOS	Volume1	0	0	4 MB								
<input checked="" type="checkbox"/>		Ubuntu_CDP	dfid;lg	Agent_Ubuntu	volume2	0	0	4.1 MB								
<input type="checkbox"/>		Ubuntu_CDP	DiskSafe	Agent		Offline	Offlin	Offline	Offlin	Offlin						
<input type="checkbox"/>		Ubuntu_CDP	DS	Agent_Ubuntu		Offline	Offlin	Offline	Offlin	Offlin						

You can also close Disk Safes using the "Disk Safes" tab of the Agent "Details" Pane. This screen provides the same functionality as the main "Disk Safes" screen. See more information in [Monitoring Agents in Data Center Console](#).